



## **Impact sound deadener**



## **CelluCushion® 5mm tech. information**


<b>Properties</b>	<b>Test Method</b>	<b>Unit</b>	<b>Value</b>
<b>Density</b>	<b>DIN 53420</b>	<b>Kg/m<sup>3</sup></b>	<b>24</b>
<b>Thermal Conductivity</b>	<b>ASTM C-117</b>	<b>W/mk</b>	<b>0,055</b>
<b>Water Absorption (after 24 hr)</b>	<b>DIN 53428</b>	<b>Vol %</b>	<b>0,7</b>
<b>Fire resistance</b>	<b>DIN 4102</b>	<b>Class</b>	<b>B2</b>
<b>Working Temperature</b>	<b>Internal</b>	<b>°C</b>	<b>-30 up to +80</b>
<b>Impact sound insulation</b>	<b>ELOT 461.2</b>	<b>dB</b>	<b>55</b>



Our products protects your products.®

CelluCushion® Impact sound deadener

**Floating floor application.**

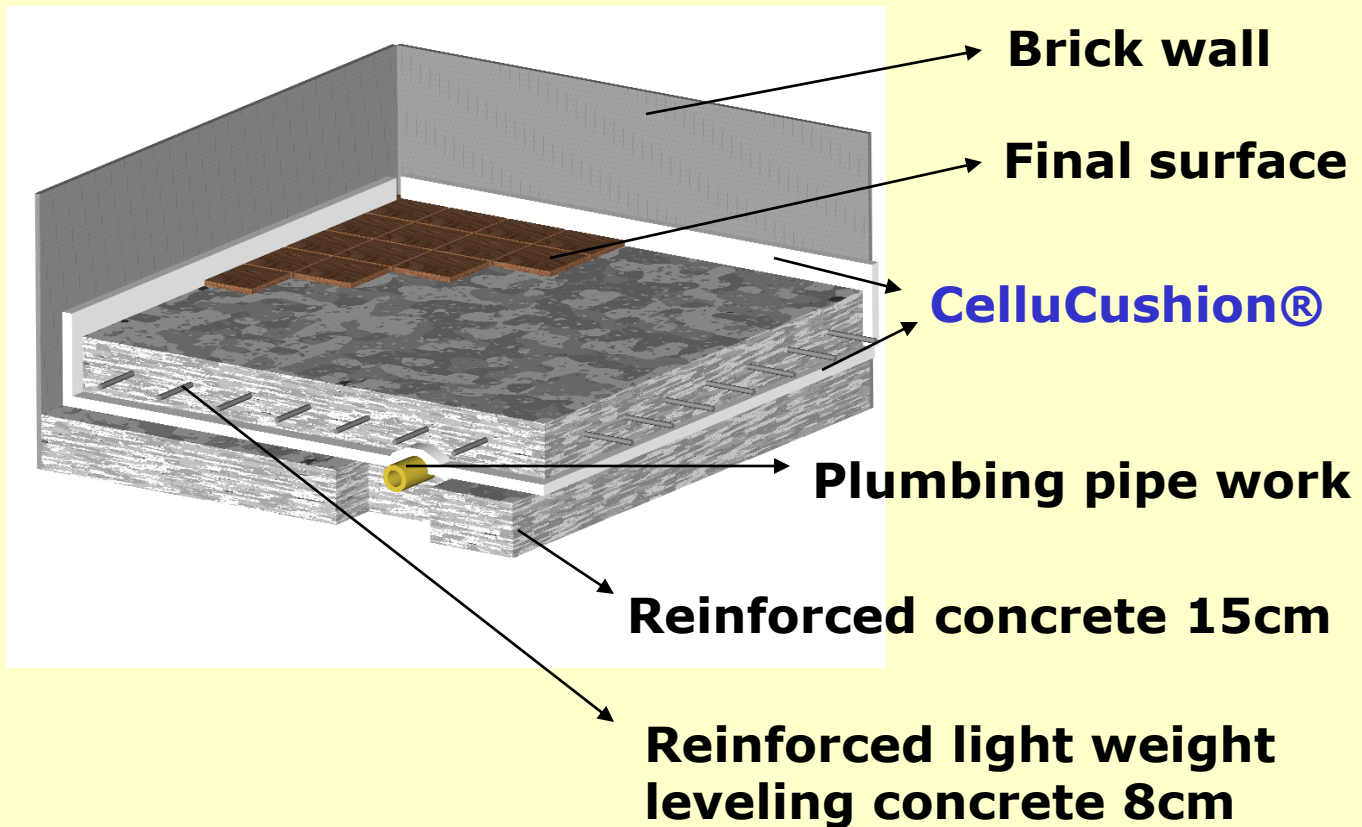

 **Sealed Air Hellas S.A.**